



Selected Products
2016–2017

Customized Height
Lamp Holder
*ACC0450



MN Series

Graphene Thermalplastic
Low Bay

- 30W / 50W / 70W
- Retrofit E40
- Screw - Based

MN030



MN050






MN070



Wattage	30W
Min. Lumen	3000
CCT	4000K / 5000K
CRI	Ra80
Beam Angle	110
Voltage	198-277V
PF	0.98
Dimension	160*160*120mm
Weight	512g
IP Rating	IP45
Lifespan	30,000hs

Wattage	50W
Min. Lumen	5000
CCT	4000K / 5000K
CRI	Ra80
Beam Angle	110
Voltage	198-277V
PF	0.98
Dimension	260*260*150mm
Weight	970g
IP Rating	IP45
Lifespan	30,000hs

Wattage	70W
Min. Lumen	7000
CCT	4000K / 5000K
CRI	Ra80
Beam Angle	110
Voltage	198-277V
PF	0.98
Dimension	290*290*150mm
Weight	1600g
IP Rating	IP45
Lifespan	30,000hs

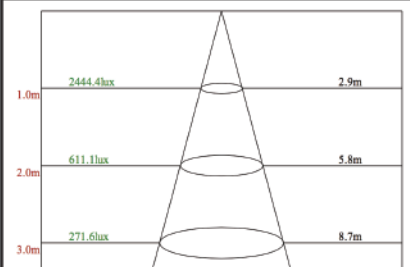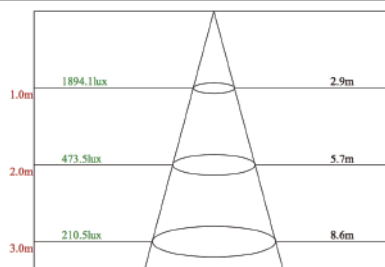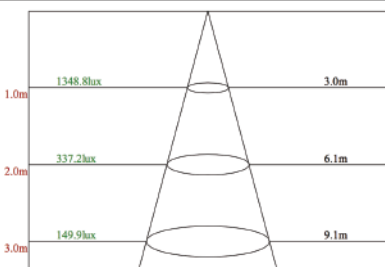




KINGKONG

Wattage	150W
Min. Lumen	16,500
CCT	4000K / 5000K
CRI	Ra80
Beam Angle	60
Voltage	198-277V
PF	0.98
Dimension	260*260*95mm
Weight	2350g
IP Rating	IP65
Lifespan	30,000hs


KINGKONG is also available in 100W.

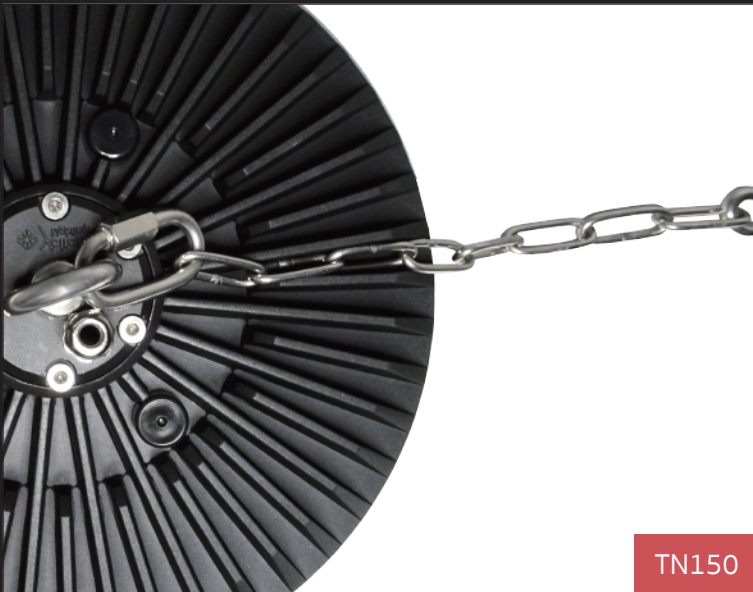

TN150

Wattage	150W
Min. Lumen	16,500
CCT	4000K / 5000K
CRI	Ra80
Beam Angle	110
Voltage	198-277V
PF	0.98
Dimension	250*250*85mm
Weight	1900g
IP Rating	IP45
Lifespan	30,000hs

TN150 is also available in 100W.

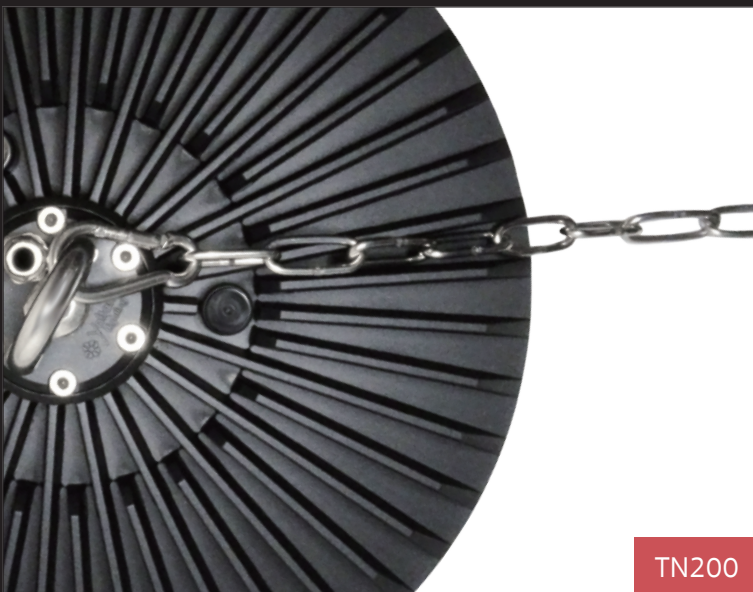

TN200

Wattage	200W
Min. Lumen	22,000
CCT	4000K / 5000K
CRI	Ra80
Beam Angle	110
Voltage	198-277V
PF	0.98
Dimension	305*305*90mm
Weight	2550g
IP Rating	IP45
Lifespan	30,000hs

TN200 is also available in 150W.



KINGKONG

'More than meets the eye.'

TN Series

Extra Slim Design Highbay

- 100W / 150W / 200W
- Easy Installation
- 110~140lm/W



DWN077

Wattage	8W
Min. Lumen	880
CCT	2700K ~ 5000K
CRI	Ra80
Beam Angle	15 / 24
Voltage	90-260V
Dimension	80*80*90mm
Weight	70*70mm
IP Rating	IP45
Lifespan	30,000hs

DWN077 is also available in 12W.

DWN089

Wattage	8W
Min. Lumen	880
CCT	2700K ~ 5000K
CRI	Ra80
Beam Angle	15 / 24
Voltage	90-260V
Dimension	75*75*65mm
Hole Size	70*70mm
IP Rating	IP45
Lifespan	30,000hs

DWN089 is also available in 12W.

DWN079

Wattage	8W
Min. Lumen	880
CCT	2700K ~ 5000K
CRI	Ra80
Beam Angle	15 / 24
Voltage	90-260V
Dimension	85*85*65mm
Hole Size	75*75mm
IP Rating	IP45
Lifespan	30,000hs

DWN079 is also available in 12W.

DWN071

Wattage	8W
Min. Lumen	880
CCT	2700 ~ 5000K
CRI	Ra80
Beam Angle	15 / 24
Voltage	90-260V
Dimension	110*110*92mm
Hole Size	100*100mm
IP Rating	IP45
Lifespan	30,000hs

DWN071 is also available in 12W.

DWN072

Wattage	8W
Min. Lumen	880
CCT	2700 ~ 5000K
CRI	Ra80
Beam Angle	15 / 24
Voltage	90-260V
Dimension	110*110*92mm
Hole Size	100*100mm
IP Rating	IP45
Lifespan	30,000hs

DWN072 is also available in 12W.


DWN073

Wattage	8W
Min. Lumen	880
CCT	2700 ~ 5000K
CRI	Ra80
Beam Angle	15 / 24
Voltage	90-260V
Dimension	110*110*92mm
Hole Size	100*100mm
IP Rating	IP45
Lifespan	30,000hs

DWN073 is also available in 12W.

Wattage	7W
Min. Lumen	700
CCT	3000K ~ 5000K
CRI	Ra80
Beam Angle	110
Voltage	198-277V
PF	0.57
Dimension	139*139*54mm
Hole Size	125*125mm
IP Rating	IP45

DWN020



This series is also available in 3W / 5W.

Wattage	18W
Min. Lumen	1800
CCT	3000K ~ 5000K
CRI	Ra80
Beam Angle	110
Voltage	198-277V
PF	0.53
Dimension	190*190*78mm
Hole Size	170*170mm
IP Rating	IP45

DWN036



This series is also available in 12W.

Wattage	10W
Min. Lumen	1000
CCT	3000K ~ 5000K
CRI	Ra80
Beam Angle	110
Voltage	198-277V
PF	0.57
Dimension	160*160*54mm
Hole Size	140*140mm
IP Rating	IP45

DWN021



This series is also available in 3W / 5W.

Wattage	24W
Min. Lumen	2400
CCT	3000K ~ 5000K
CRI	Ra80
Beam Angle	110
Voltage	198-277V
PF	0.53
Dimension	230*230*82mm
Hole Size	210*210mm
IP Rating	IP45

DWN037



This series is also available in 12W.

Wattage	15W
Min. Lumen	1500
CCT	3000K ~ 5000K
CRI	Ra80
Beam Angle	110
Voltage	198-277V
PF	0.57
Dimension	190*190*54mm
Hole Size	170*170mm
IP Rating	IP45

DWN022



This series is also available in 3W / 5W.

Wattage	15W
Min. Lumen	1500
CCT	3000K ~ 5000K
CRI	Ra80
Beam Angle	110
Voltage	198-277V
PF	0.53
Dimension	138*138*82mm
Hole Size	120*120mm
IP Rating	IP45

DWN038



Also available in 7W / 10W / 30W / 36W.

Wattage	18W
Min. Lumen	1800
CCT	3000K ~ 5000K
CRI	Ra80
Beam Angle	110
Voltage	198-277V
PF	0.57
Dimension	235*235*54mm
Hole Size	210*210mm
IP Rating	IP45

DWN023



This series is also available in 3W / 5W.

Wattage	20W
Min. Lumen	2000
CCT	3000K ~ 5000K
CRI	Ra80
Beam Angle	110
Voltage	198-277V
PF	0.53
Dimension	165*165*91mm
Hole Size	140*140mm
IP Rating	IP45

DWN039



Also available in 7W / 10W / 30W / 36W.

More Colour This Time

3000K 45W Track Spotlight Ra90 with 110lm/W

ALF Series



ALF001

Wattage	45W
Min. Lumen	4500
CCT	3000K - 3500K
CRI	Ra90
LED Brand	Luminus
Beam Angle	35
Voltage	198-277V
Driver	Philips
PF	0.98
Dimension	100*100*120mm
Weight	782g
Lifespan	30,000hs



ALF003

Wattage	30W
Min. Lumen	3000
CCT	2700K ~ 3500K
CRI	Ra80 / Ra90
LED Brand	Luminus
Beam Angle	35
Voltage	198-277V
Driver	Philips
PF	0.98
Dimension	106*106*155mm
Weight	1190g
Lifespan	30,000hs



ALF002

Wattage	45W
Min. Lumen	4500
CCT	3000K - 3500K
CRI	Ra90
LED Brand	Luminus
Beam Angle	25
Voltage	198-277V
Driver	Philips
PF	0.98
Dimension	110*110*140mm
Weight	920g
Lifespan	30,000hs



ALF004

Wattage	30W
Min. Lumen	3000
CCT	2700K ~ 3500K
CRI	Ra80 / Ra90
LED Brand	Luminus
Beam Angle	35
Voltage	198-277V
Driver	Philips
PF	0.98
Dimension	85*85*65mm
Weight	1190g
Lifespan	30,000hs



Rome Series

Standard Size
High GAI Spotlight

- Luminus Inside
- 7W / 560Lm
- Red-Enhanced Ra80
- Retrofit GU10
- Design for Commercial Lighting Area and Exhibition Halls

RF013

'Where there is life,
there is hope.'

Selected Retrofit Bulbs

The Basic



4W
300Lm

RF016

Rome Series



5W
410Lm

RF011

Rome Series



7W
560Lm

RF012

Rome Series



7W
560Lm

RF013

Trophy Series



6W
360Lm

RF005

High Efficiency



6W
840Lm

CR007

High Efficiency



8W
1120Lm

CR011

High Efficiency



6W
840Lm

CR009

High Efficiency



8W
1120Lm

CR013

Trophy Series



6W
360Lm

RF004


Buckle Series



5W
450Lm

BC001

Buckle Series



7W
630Lm

BC002

Buckle Series



9W
810Lm

BC003

Trophy Series



6W
360Lm

RF006



Yaltan Lighting Company Limited

© All Rights Reserved

2016–2017

www.yaltan.com